

M12 90° Male

4 Pos – 0.5mm² – PUR – Code A



0.5 mm²



150/250 VDC



4 POS – A



4 A



-40°C



+85°C



CHEMICALS



ABRASION



IP 67




UV

Specifications & qualifications

-

Specific lengths or custom terminations on demand				
Part number	L	Cable	Outer diameter	Cable specifications
0009-0000-01000A	1000 mm	4x0.5mm²	6.1 ± 0.25	PUR HT class C Black Color According to ISO 6722
0009-0000-02000A	2000 mm	4x0.5mm²		
0009-0000-05000A	5000 mm	4x0.5mm²		
0009-0000-10000A	10000 mm	4x0.5mm²		

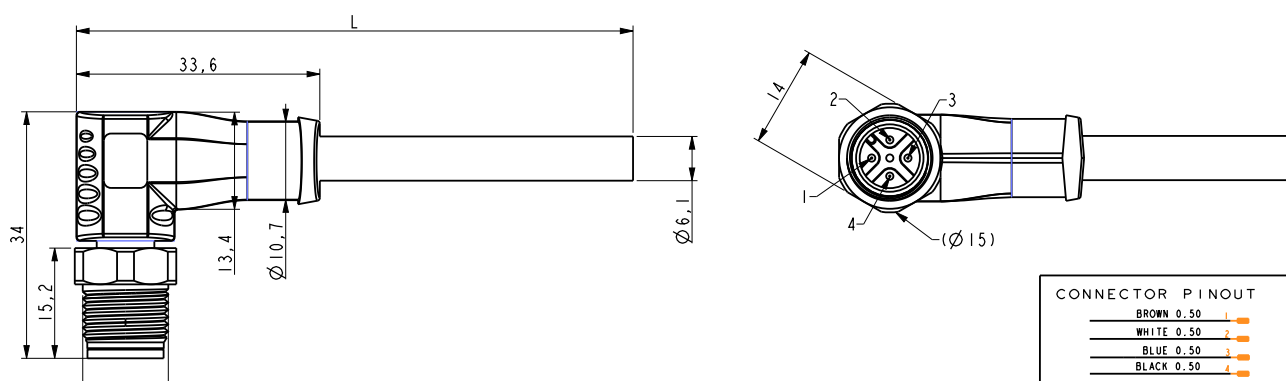

The information herein is provided "as is". Please be aware that the device may be damaged, and functionality cannot be assumed, if the limits or the parameters in this datasheet is exceeded. For avoidance, of doubt, Rimaster takes no responsibility in such cases. To the maximum extent permitted by law, Rimaster makes no warranty of suitability, merchantability, fitness for a particular purpose or non-infringement of third party's intellectual property rights. Moreover, Rimaster takes no responsibility for any indirect, consequential or special damages.